


**Specification:**

- housing made of galvanized or stainless steel
- holder in the housing for the pump adapter
- painting with powder or thermoplastic paint
- tools on stainless steel lines fi 4 mm
  - Phillips screwdriver (+ swivel)
  - flat screwdriver (+ swivel)
  - adjustable spanner 0-30 mm
  - HEX key set in the handle 2-8 mm (+ swivel)
  - tire levers x 2 pcs.
  - double chamber anodized aluminum IBOMBO AISIPRO HEAD™ pump adapter for all types of bicycle valves (Presta, Schrader and Dunlop) with industrial grade AISI304 stainless steel internals
  - manual stationary bicycle pump max. 10 bar:
    - thick piston made of stainless steel AISI304 fi 14 mm
    - stainless steel pump handle fi 32 mm
    - anodized aluminum sealant (PA6)
    - antifog pressure gauge with glycerin
- mounting kit (4 x M10 anchors, 75 mm)
- anti-theft nuts for the base of the station with a patent key
- anti-theft screws securing the element of the station with service tips
- possibility to mount up to 6 tools
- branding of the front and two walls of the station with foil and laminate
  - 4 x 10,5 x 54 cm

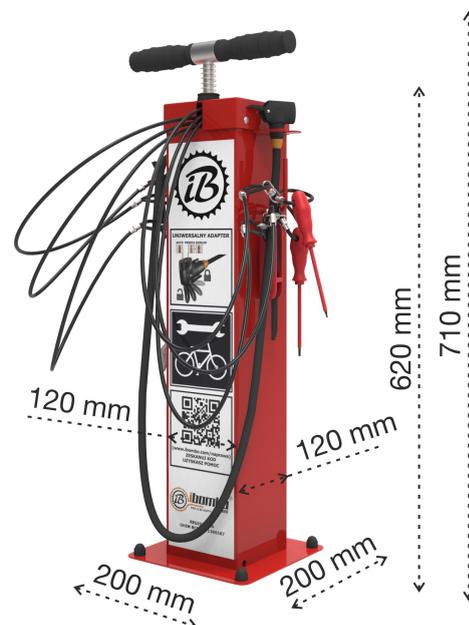

**Self-Service Bike Repair Station** is adapted for use in public space. Its housing is made of **galvanized/stainless steel, powder or plastic coated**. The device is mounted to the ground or walls with anchors. **Stainless steel cables** hanging inside the device housing are used to attach tools to them; their length allows you to reach some parts of the bike. **Swivels** allow for better comfort of use when adjusting with screwdrivers or allen keys. The station is equipped with a manual air pump with a **thick piston** made of stainless steel AISI304 fi 14 mm and **an antifog manometer with glycerin**. Double chamber anodized aluminum pump adapter for all types of bicycle valves (Presta, Schrader and Dunlop) with industrial grade AISI304 stainless steel internals. **The QR CODE** located on the front of the station allows the use online publications containing instructions for repairing bicycle faults. The sheet metal components in the device are connected by **anti-theft screws**.

IBOMBO sp. z o.o.

Strzyżewice, ul. Modelarska 9a, 64-100 Leszno, POLAND  
KRS: 0000923409, NIP: 6972383411, REGON: 520012450

biuro@ibombo.com | www.ibombo.com | +48 730-070-730

